



BRIGHTSTARTW

Safe and Performance

3 SWITCHED COLORS

DARKBUSTER

1 & 2

LED AUX. LIGHT

BRIGHTSTARTW

Adjustable Kelvin

PATENTED

LED Auxiliary Light

in more than **20** countries

Easy to switch for all climates and environments





BRIGHTSTARTW
www.brightstar.com.tw

LED



AUXILIARY LIGHT

DARKBUSTER 1 55W 6000LM



Standard

BS 2020-1

Order Code : D2055507S, D2055515V




Halo Design (Angel Eyes)


BS 2020-1A

Order Code : D2055507SA, D2055515VA

Narrow Spot

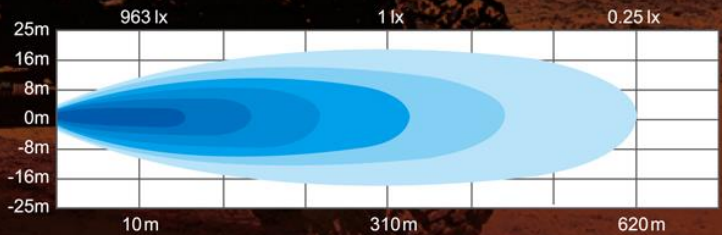

Spot

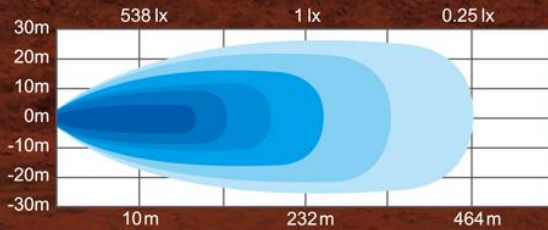

Specification

LED Chip Wattage	55W	Weatherproof	IP68
Inside Chip	BSTW Premium Technology	Housing	Die Cast Aluminum
Color Temperature / Luminous Flux	2500K 3000LM/4200K 6000LM/6500K 3000LM (Chip)	Mounting Material	Stainless Steel
Input Voltage	Standard DC9-30V / Halo Design(Angel Eyes) DC 12V only	Version	Standard/Halo Design (Angel Eyes)

DARKBUSTER 2 30W 3000LM



Standard

BS 2028

Order Code : D2053007S, D2053015V




Halo Design (Angel Eyes)


BS 2028-1

Order Code : D2053007SA, D2053015VA

Narrow Spot

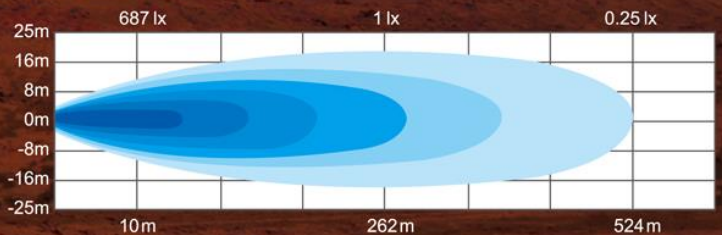

Spot

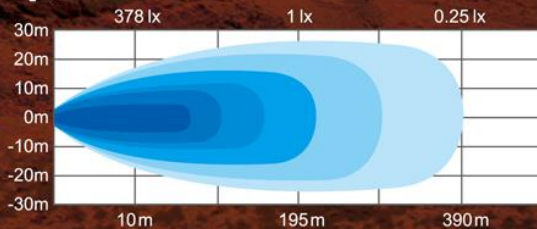

Specification

LED Chip Wattage	30W	Weatherproof	IP68
Inside Chip	BSTW Premium Technology	Housing	Die Cast Aluminum
Color Temperature / Luminous Flux	2500K 1600LM/4200K 3000LM/6500K 1600LM (Chip)	Mounting Material	Stainless Steel
Input Voltage	Standard DC9-30V / Halo Design(Angel Eyes) DC 12V only	Version	Standard/Halo Design (Angel Eyes)