



# BRIGHTSTARTW

*Safe and Performance*

## 3 SWITCHED COLORS

---

DARKBUSTER

1 & 2

LED AUX. LIGHT

BRIGHTSTARTW

*Adjustable Kelvin*

**PATENTED**

# LED Auxiliary Light

in more than **20** countries

**Easy to switch for all climates and environments**





**BRIGHTSTARTW**  
www.brightstar.com.tw

**LED**



**AUXILIARY LIGHT**

**DARKBUSTER 1 55W 6000LM**



**Standard**

BS 2020-1

Order Code : D2055507S, D2055515V




**Halo Design (Angel Eyes)**


BS 2020-1A

Order Code : D2055507SA, D2055515VA

**Narrow Spot**

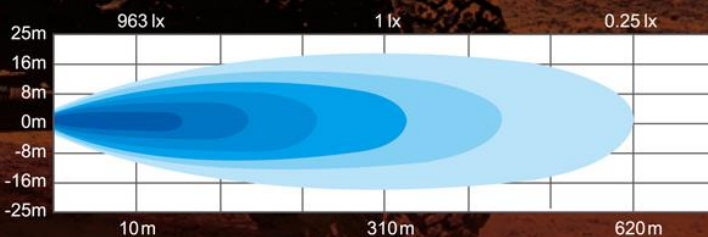

**Spot**

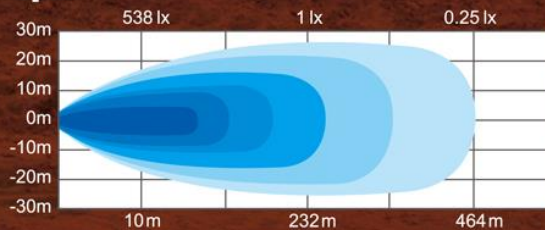

**Specification**

|                                   |   |                   |                                   |
|-----------------------------------|---|-------------------|-----------------------------------|
| LED Chip Wattage                  | 55W   | Weatherproof      | IP68                              |
| Inside Chip                       | BSTW Premium Technology                       | Housing           | Die Cast Aluminum                 |
| Color Temperature / Luminous Flux | 2500K 3000LM/4200K 6000LM/6500K 3000LM (Chip) | Mounting Material | Stainless Steel                   |
| Input Voltage                     | DC9-30V                                       | Version           | Standard/Halo Design (Angel Eyes) |

**DARKBUSTER 2 30W 3000LM**



**Standard**

BS 2028

Order Code : D2053007S, D2053015V




**Halo Design (Angel Eyes)**


BS 2028-1

Order Code : D2053007SA, D2053015VA

**Narrow Spot**

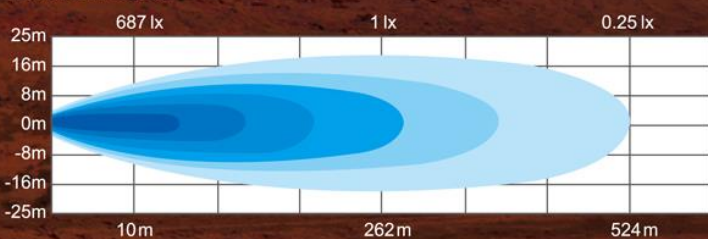

**Spot**

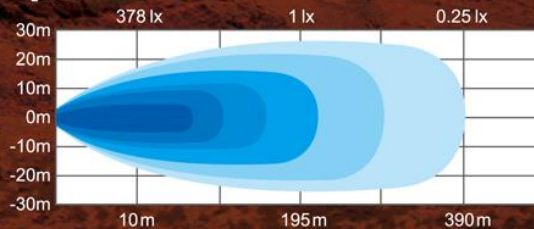

**Specification**

|                                   |   |                   |                                   |
|-----------------------------------|---|-------------------|-----------------------------------|
| LED Chip Wattage                  | 30W   | Weatherproof      | IP68                              |
| Inside Chip                       | BSTW Premium Technology                       | Housing           | Die Cast Aluminum                 |
| Color Temperature / Luminous Flux | 2500K 1600LM/4200K 3000LM/6500K 1600LM (Chip) | Mounting Material | Stainless Steel                   |
| Input Voltage                     | DC9-30V                                       | Version           | Standard/Halo Design (Angel Eyes) |